

Kenstel KAP530 is a two-radio, cloud-managed 4×4 MIMO 802.11ax/ac Wave 2 access point. Designed for general purpose, next-generation deployments in outdoor locations and industrial indoor conditions, the KAP530 offers performance, enterprise-grade security, and intuitive management. The KAP530 delivers a maximum 5.4 Gbps aggregate frame rate with concurrent 2.4 GHz and 5 GHz radios. KAP530 delivers the high throughput, reliability, and flexibility required by the most demanding business applications like voice and high-definition streaming video, even in the harshest outdoor environments



Dual-band 4×4 MIMO 802.11ax/ac Wave 2 access point with cloud management



Education

Experience Life in High Speed.



Hospitality

Enabling Seamless Connectivity for Every Guest Experience



Office

Keeping Your Office Connected and Efficient

Manufactured By:

Kenstel Networks Limited 34D Sector 57 HSIIDC Industrial Area Phase IV Kundli Haryana - 131028.
mail id - kenstel@gmail.com.

PRODUCT HIGHLIGHTS

- IP67 design for use in outdoor environments
- Aggregate data rate of 5.4 Gbps
- Self-configuring, Self-healing mesh
- Inbuilt high gain Omni directional Antennas
- Remote management via HTTP, HTTPS, Secure SSH, Telnet, SSL, SNMP management v1/v2c/v3
- Configuration file backup and restore by TFTP or FTP, HTML
- Rich system information –AP status, station status, event logs
- IPv4 and IPv6 dual stack support
- IEEE 802.11a/b/g/n/ac/ax compliant
- 2.4GHz and 5GHz concurrent radios

TECHNICAL SPECIFICATION

Wi-Fi Standards

- IEEE 802.11b/g/n/ax on 2.4GHz
- IEEE802. 11a/n/ac/ax on 5GHz

Wireless Capabilities

- DL-OFDMA UL-OFDMA, TWT support, BSS Coloring
- 4 × 4 multiple input, multiple output (MIMO) with four spatial streams
- SU-MIMO, UL MU-MIMO and DL MU-MIMO support
- Maximal ratio combining (MRC) & beamforming

- 20 and 40 MHz channels (802.11n); 20, 40, and 80 MHz channels (802.11ac Wave 2); 20, 40 80 and 160 MHz channels (802.11ax)
- Up to 1024-QAM on both 2.4 GHz & 5 GHz bands

MIMO

- 2×2 SU-MIMO/MU-MIMO on 2.4 Ghz
- 4×4 SU-MIMO/MU-MIMO on 5Ghz

Antenna

- Internal Omni Directional Antenna (7dBi gain at 2.4 GHz, 9dBi gain at 5 GHz)

Max aggregate frame rate (Mbps):

- 2.4 GHz: Max 600 | 5 GHz: Max 4800

TECHNICAL SPECIFICATION

Supported Data Rates (Mbps):

- 802.11ax:
- 2.4 GHz: 9 to 574 (MCS0 to MCS11, NSS = 1 to 2)
- 5 GHz: 18 to 4800 (MCS0 to MSC11, NSS = 1 to 4)
- 802.11b: 1, 2, 5.5, 11
- 802.11a/g: 6, 9, 12, 18, 36, 48, 54
- 802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)
- 802.11ac: 6.5 to 1733 Mbps (MCS0 to MCS9, NSS = 1 to 4), , 2166 with 1024-QAM

Supported Radio Technologies

- 802.11b: Direct-sequence spread-spec trum (DSSS)
- 802.11a/g/n/ac: Orthogonal frequency-di vision multiplexing (OFDM)
- 802.11ax: Orthogonal frequency-division multiple access (OFDMA) with up to 16 resource units (RU)

Supported Modulation

- 802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM
- 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
- 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM
- 802.11b: BPSK, QPSK, CCK

Channelization

- 802.11ax supports high efficiency (HE) — HE 20/40/80/160 MHz
- 802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz
- 802.11n supports high throughput (HT) — HT 20/40 MHz
- 802.11n supports very high throughput under the 2.4GHz radio –VHT40 MHz (256-QAM)
- 802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

Maximum Transmit Power

- 2.4GHz 27dBm
- 5GHz 26dBm

Physical Interface

- 2 x GE Port (PoE)
- 1 x Reset Button

LED Indicators

- 1 x Power | 2 x LAN | 1 x WiFi

Power Source

- Power-over-Ethernet: 802.3at Input

Maximum Power Consumption

- 23W

SOFTWARE SPECIFICATION**IP**

- IPv4, IPv6, dual stack

Max Concurrent User

- Upto 256

Max SSID

- Upto 16

Wireless authentication

- WEP, WPA, WPA2-PSK, WPA3 - Personal, WPA3 – Enterprise, WPA3 - Enhanced Open (OWE)
- EAP-TLS, EAP-TTLS, EAP-MSCHAPv2, EAP-SIM
- IEEE 802.1X based Authentications
- HOTSPOT 2.0

Roaming

- Fast roaming based on 802.11r/k
- Seamless Roaming for Captive Portal user

RRM

- Automatic interference cancellation
- Smart Frequency selection
- Automatic Transmit power Optimization
- Coverage hole detection and mitigation

External Authentication

- Authentication via Radius
- Authentication via Active Directory (AD)

Captive Portal

- Click Through
- Simple Password
- Voucher
- Local User
- SMS OTP
- Custom Survey
- Social Media
- Advertisement

Operating Modes

- Bridge Mode
- Gateway Mode

Tunnels

- L2TP V2/V3
- GRE/EoGRE
- Openvpn
- IPSEC
- PPTP
- Wireguard/SSL

Routing

- Static routes
- RIP v1/v2
- OSPF
- BGP4
- Policy based Routing(PBR)

SOFTWARE SPECIFICATION

Security

- Port/Mac/IP/Proto based filtering
- ICMP/TCP/UDP/DHCP Flood attack defence
- ARP Spoofing Prevention
- Rogue AP detection
- Man in middle and Honeytrap Attack prevention
- Client Isolation
- L2/L3 ACL
- MFP

QoS

- WMM and 802.1e
- Port/Proto/DSCP/IP/Mac based Traffic Shaping

- Per SSID Bandwidth Limiting
- Airtime Fairness
- Band Steering

VLAN Tagging

- Supports 802.1q SSID-to-VLAN Tagging

SNMP

- v1, v2c, v3

MIB

- I/II, Private MIB

Management

- Local UI,SSH,TELNET,SNMP,TR069

CLOUD MANAGEMENT




Wireless Access Point

Our enterprise WLAN APs are specifically engineered to meet the demanding networking needs of businesses, government agencies, educational institutions, and more.



WLAN Controller

It serves as a centralized platform that enables administrators to configure, monitor, and maintain multiple access points (APs) within the network.

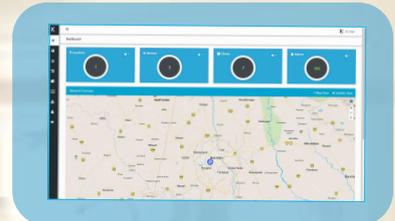

Cloud Management

A powerful and intuitive web-based interface that revolutionizes the way you manage and monitor your wireless network infrastructure.

KAP-530 RF TABLE 2.4GHz

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
2.4 GHz	802.11b	1 Mb/s	27 dBm	-96 dBm
		2 Mb/s	27 dBm	-93 dBm
		5.5 Mb/s	27 dBm	-91 dBm
		11 Mb/s	27 dBm	-89 dBm
2.4 GHz	802.11g	6 Mb/s	27 dBm	-91 dBm
		9 Mb/s	27 dBm	-90 dBm
		12 Mb/s	27 dBm	-88 dBm
		18 Mb/s	26 dBm	-87 dBm
		24 Mb/s	26 dBm	-84 dBm
		36 Mb/s	26 dBm	-81 dBm
		48 Mb/s	25 dBm	-76 dBm
		54 Mb/s	25 dBm	-75 dBm

KAP-530 RF TABLE 5GHz

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
2.4 GHz	802.11n (HT20)	MCS0/8	27/27 dBm	-91/91 dBm
		MCS1/9	27/27 dBm	-88/88 dBm
		MCS2/10	26/26 dBm	-85/85 dBm
		MCS3/11	26/26 dBm	-82/82 dBm
		MCS4/12	25/25 dBm	-79/79 dBm
		MCS5/13	25/25 dBm	-75/75 dBm
		MCS6/14	25/25 dBm	-73/73 dBm
		MCS7/15	24/24 dBm	-70/70 dBm
2.4 GHz	802.11n (HT40)	MCS0/8	27/27 dBm	-89/89 dBm
		MCS1/9	27/27 dBm	-86/86 dBm
		MCS2/10	26/26 dBm	-83/83 dBm
		MCS3/11	26/26 dBm	-80/80 dBm
		MCS4/12	25/25 dBm	-77/77 dBm
		MCS5/13	25/25 dBm	-73/73 dBm
		MCS6/14	25/25 dBm	-72/72 dBm
		MCS7/15	24/24 dBm	-70/70 dBm

KAP-530 RF TABLE 5GHz

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
5GHz	802.11a	6 Mb/s	26 dBm	-90 dBm
		9 Mb/s	26 dBm	-87 dBm
		12 Mb/s	26 dBm	-86 dBm
		18 Mb/s	26 dBm	-85 dBm
		24 Mb/s	25 dBm	-84dBm
		36 Mb/s	25 dBm	-79dBm
		48 Mb/s	25 dBm	-74dBm
		54 Mb/s	26 dBm	-71dBm
5GHz	802.11n (HT20)	MCS0/8	26/26 dBm	-88/-88 dBm
		MCS1/9	26/26 dBm	-85/-85 dBm
		MCS2/10	25/25 dBm	-83/-83 dBm
		MCS3/11	25/25 dBm	-79/-79 dBm
		MCS4/12	24/24 dBm	-76/-76 dBm
		MCS5/13	24/24 dBm	-72/-72 dBm
		MCS6/14	23/23 dBm	-71/-71 dBm
		MCS7/15	23/23 dBm	-69/-69 dBm

KAP-530 RF TABLE 5GHz

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
5GHz	802.11n(VH20)	MCS0/0	26/26 dBm	-88/-88 dBm
		MCS1/1	26/26 dBm	-86/-86 dBm
		MCS2/2	25/25 dBm	-83/-83 dBm
		MCS3/3	25/25 dBm	-79/-79 dBm
		MCS4/4	24/24 dBm	-77/-77 dBm
		MCS5/5	24/24 dBm	-75/-75 dBm
		MCS6/6	23/23 dBm	-72/-72 dBm
		MCS7/7	23/23 dBm	-70/-70 dBm
		MCS8/8	22/22 dBm	-67/-67 dBm
5GHz	802.11n (VHT40)	MCS0/8	26/26 dBm	-85/-85 dBm
		MCS1/9	26/26 dBm	-84/-87 dBm
		MCS2/10	25/25 dBm	-84/-84 dBm
		MCS3/11	25/25 dBm	-79/-79 dBm
		MCS4/12	24/24 dBm	-77/-77 dBm
		MCS5/13	24/24 dBm	-72/-72 dBm
		MCS6/14	23/23 dBm	-70/-70 dBm
		MCS7/15	23/23 dBm	-68/-68 dBm

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
5 GHz	802.11n (VHT40)	MCS0/0	26/26 dBm	-85/-85 dBm
		MCS1/1	26/26 dBm	-82/-82 dBm
		MCS2/2	25/25 dBm	-79/-79 dBm
		MCS3/3	25/25 dBm	-77/-77 dBm
		MCS4/3	24/24 dBm	-74/-74 dBm
		MCS5/5	24/24 dBm	-70/-70 dBm
		MCS6/6	23/23 dBm	-68/-68 dBm
		MCS7/7	23/23 dBm	-67/-67 dBm
		MCS8/8	22/22 dBm	-64/-64 dBm
		MCS9/9	22/22 dBm	-63/-63 dBm
5 GHz	802.11n (VHT80)	MCS0/0	26/26 dBm	-83/-83 dBm
		MCS1/1	26/26 dBm	-81/-81 dBm
		MCS2/2	25/25 dBm	-79/-79 dBm
		MCS3/3	25/25 dBm	-76/-76 dBm
		MCS4/3	24/24 dBm	-73/-73 dBm
		MCS5/5	24/24 dBm	-70/-70 dBm
		MCS6/6	23/23 dBm	-67/-67 dBm
		MCS7/7	23/23 dBm	-66/-66 dBm

KAP-530 RF TABLE 5GHz

Operating Band	Operating Mode	Data Rate	TX Power	RX Sensitivity
		MCS8/8	22/22dBm	-62/-62 dBm
		MCS9/9	22/22 dBm	-60/-60 dBm

MECHANICAL SPECIFICATION



Temperature Range

Operating temperature 0°C to +50°C / +32°F to +122°F | Storage Temperature -40° C to +70° C (-40° F to +158° F)




Waterproof & Dustproof

IP67-Rated Enclosure



Humidity (non-condensing)

Operating Humidity 90% or less
Storage Humidity 90% or less

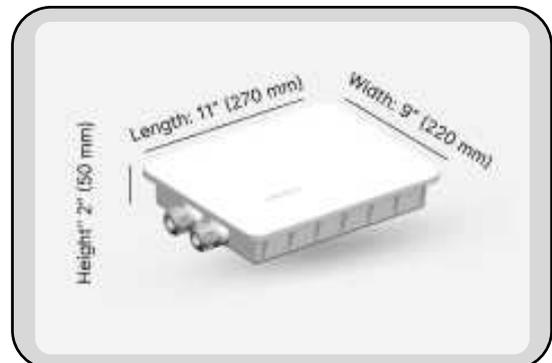

Dimensions

Weight: 1Kg | Width: 9" (220 mm) |
Length: 11" (270 mm) | Height: 2" (50 mm)

Experience connectivity redefined with KAP530 - your partner in solving the challenges of indoor and industrial connectivity with unparalleled speed, reliability, and intelligence. Embrace the future of wireless communication with Kenstel!